

**HydroGen**

Distribuido en España por:



H<sub>2</sub>  
N  
A

# HG RACK 2U BASIC (SX 3080)

## PEM Rack 19 inch Hydrogen generator with ZeroAir integrated

The HydroGen series **HG RACK 19 inch 2U BASIC** is able to generate up to 350 cc/min of Hydrogen with purity better than 99.9999% and pressure up to 10 bar (145 psi). The HG 2U 19 inch BASIC includes a new long life multilayer electrolytic cell with polymeric membrane (PEM) using distilled water. No acid or alkaline solutions are used.

The innovative drying system ensures the maximum grade of hydrogen purity, protects the GC thanks to its innovative humidity safe guard, HG 19 inch 2U BASIC is completely maintenance-free and allows continuous operation, 24 hours a day.

The on-board CPU automatically check for internal leaks and constantly control the operating parameters to guarantee full safety. Up to 20 units can be connected in parallel mode using an external control box.


The touch-screen LCD interface provides simple and user-friendly management of all functions on the unit.

### Main Applications

- GC-FID / GC-NPD / GC-FPD
- THA
- Gas sensing

### Main Advantages

- ✓ Quick installation
- ✓ Easy use
- ✓ Hydrogen flow rate up to 350 cc/min
- ✓ ZeroAir flow rate up to 2000 cc/min
- ✓ Pressure up to 10 bar (145 psi)
- ✓ Hydrogen purity: 99.9999%
- ✓ THC: < 0.1 ppm
- ✓ RS 485 and USB as standard
- ✓ LAN optional
- ✓ Dryer with no maintenance
- ✓ Reduced foot print: 19 inch rack 2U
- ✓ Smart humidity safe guard (patented)
- ✓ High pressure GLS electronically controlled (patented)

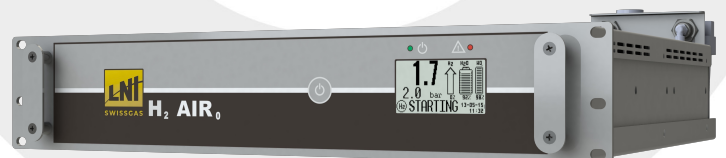

**R Evolution**  
in Gas Generators

## Specifications



Models: HG 2U BASIC	100	160	250	350
<b>General data</b>				
Electrolytic cell	PEM technology			
Drying system	Static dryer			
H2 purity	>99.9999% <sup>1</sup>			
Outlet pressure	7 bars (100 psi) / 10 bars (145 psi) (optional)			
H2 flow-rate cc/min (Max)	100	160	250	350
Dimensions	Standard 2U RACK (48 cm deep)			
Net weight (no water in tank)	15 kg			
<b>Communication</b>				
RS485/USB	Standard			
LAN	Optional			
<b>Software functions</b>				
Parallel mode	Ready on board			
Automatic tank refill	Standard			
<b>Water</b>				
Quality	Deionized, ASTM II, <0.1uS			
Supply pressure (min, Max)	-0.2 bars (1.4 psi), 0.5 bar (7.25 psi)			
Internal tank capacity	0.3 l			
<b>Electrical data</b>				
Type of connection	IEC 320-C13			
Power supply voltage	100-240 Vac 50/60 Hz			
Installed power (Max)	350W			
Fuse rating (5x 20 mm)	4A 250VAC			
<b>Connections</b>				
Hydrogen outlet	1/8" compression fitting			
Water (inlet, drain)	Quick release push-in fitting			
<b>ZeroAir section (optional)</b>				
Inlet pressure (Max)	8 bars (116 psi)			
THC (Inlet Air)	100ppm			
Outlet flow rate (max)	2000 cc/min			
Outlet pressure (max)	Inlet pressure – 0.5 bars (8 psi) at maximum flow			
THC (ZeroAir Outlet)	<0.1ppm			
Inlet, Outlet ports	1/8" BSPP female			

<sup>1</sup> Referred to O<sub>2</sub> - DewPoint < -25°C

### Ordering codes

#### Gas Generators

6920.11.010

HG 2U BASIC 100

6920.11.016

HG 2U BASIC 160

6920.11.025

HG 2U BASIC 250

6920.11.035

HG 2U BASIC 350

#### Accessories (optionals)

6930.00.120

ZA 2U (catalyst)

#### Consumable

6930.00.050

De-ionisation Cartridge



LNI GGI srl

www.lni-swissgas.eu



**Ingeniería Analítica**  
Chromatography & Spectrometry

Avda. Cerdanyola, 73 4ª izquierda 08172 Sant Cugat del Vallés (Barcelona) SPAIN  
Tel. +34 902 45 66 77 | www.ingenieria-analitica.com | e-mail: inf@ingenieria-analitica.com